





CEILING
LIGHTING
AMBIENCE

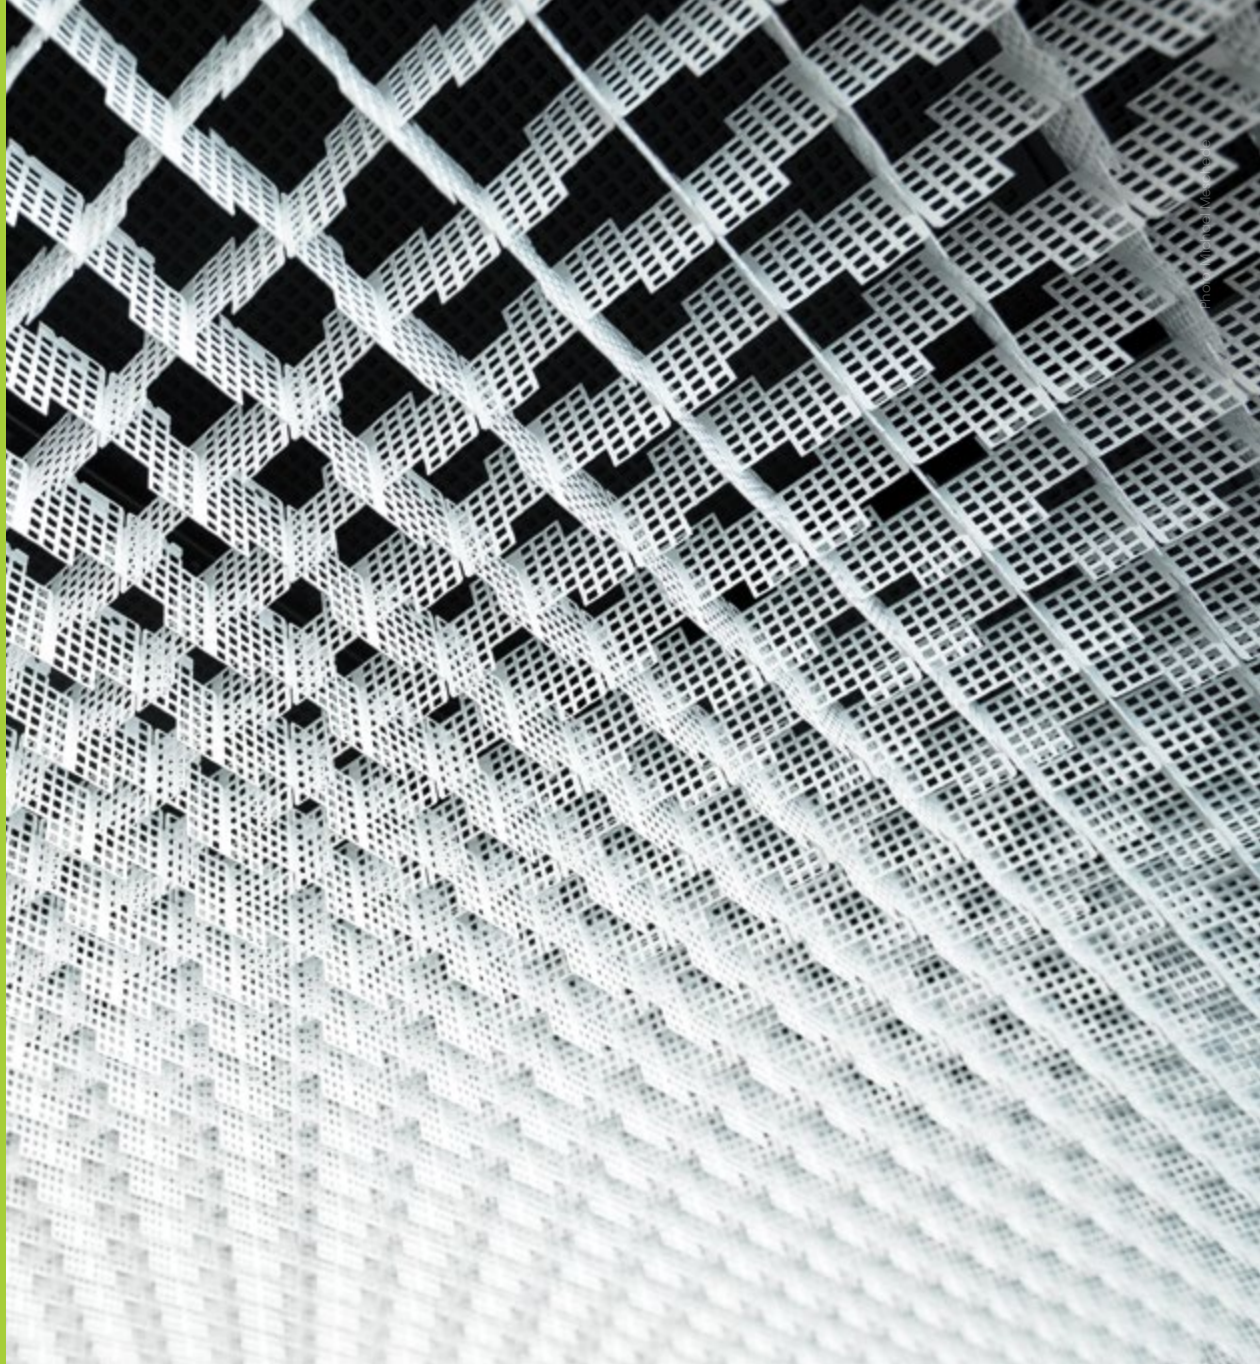

TICELL-N

OPEN CELL CEILING

PRODUCT DATA SHEET

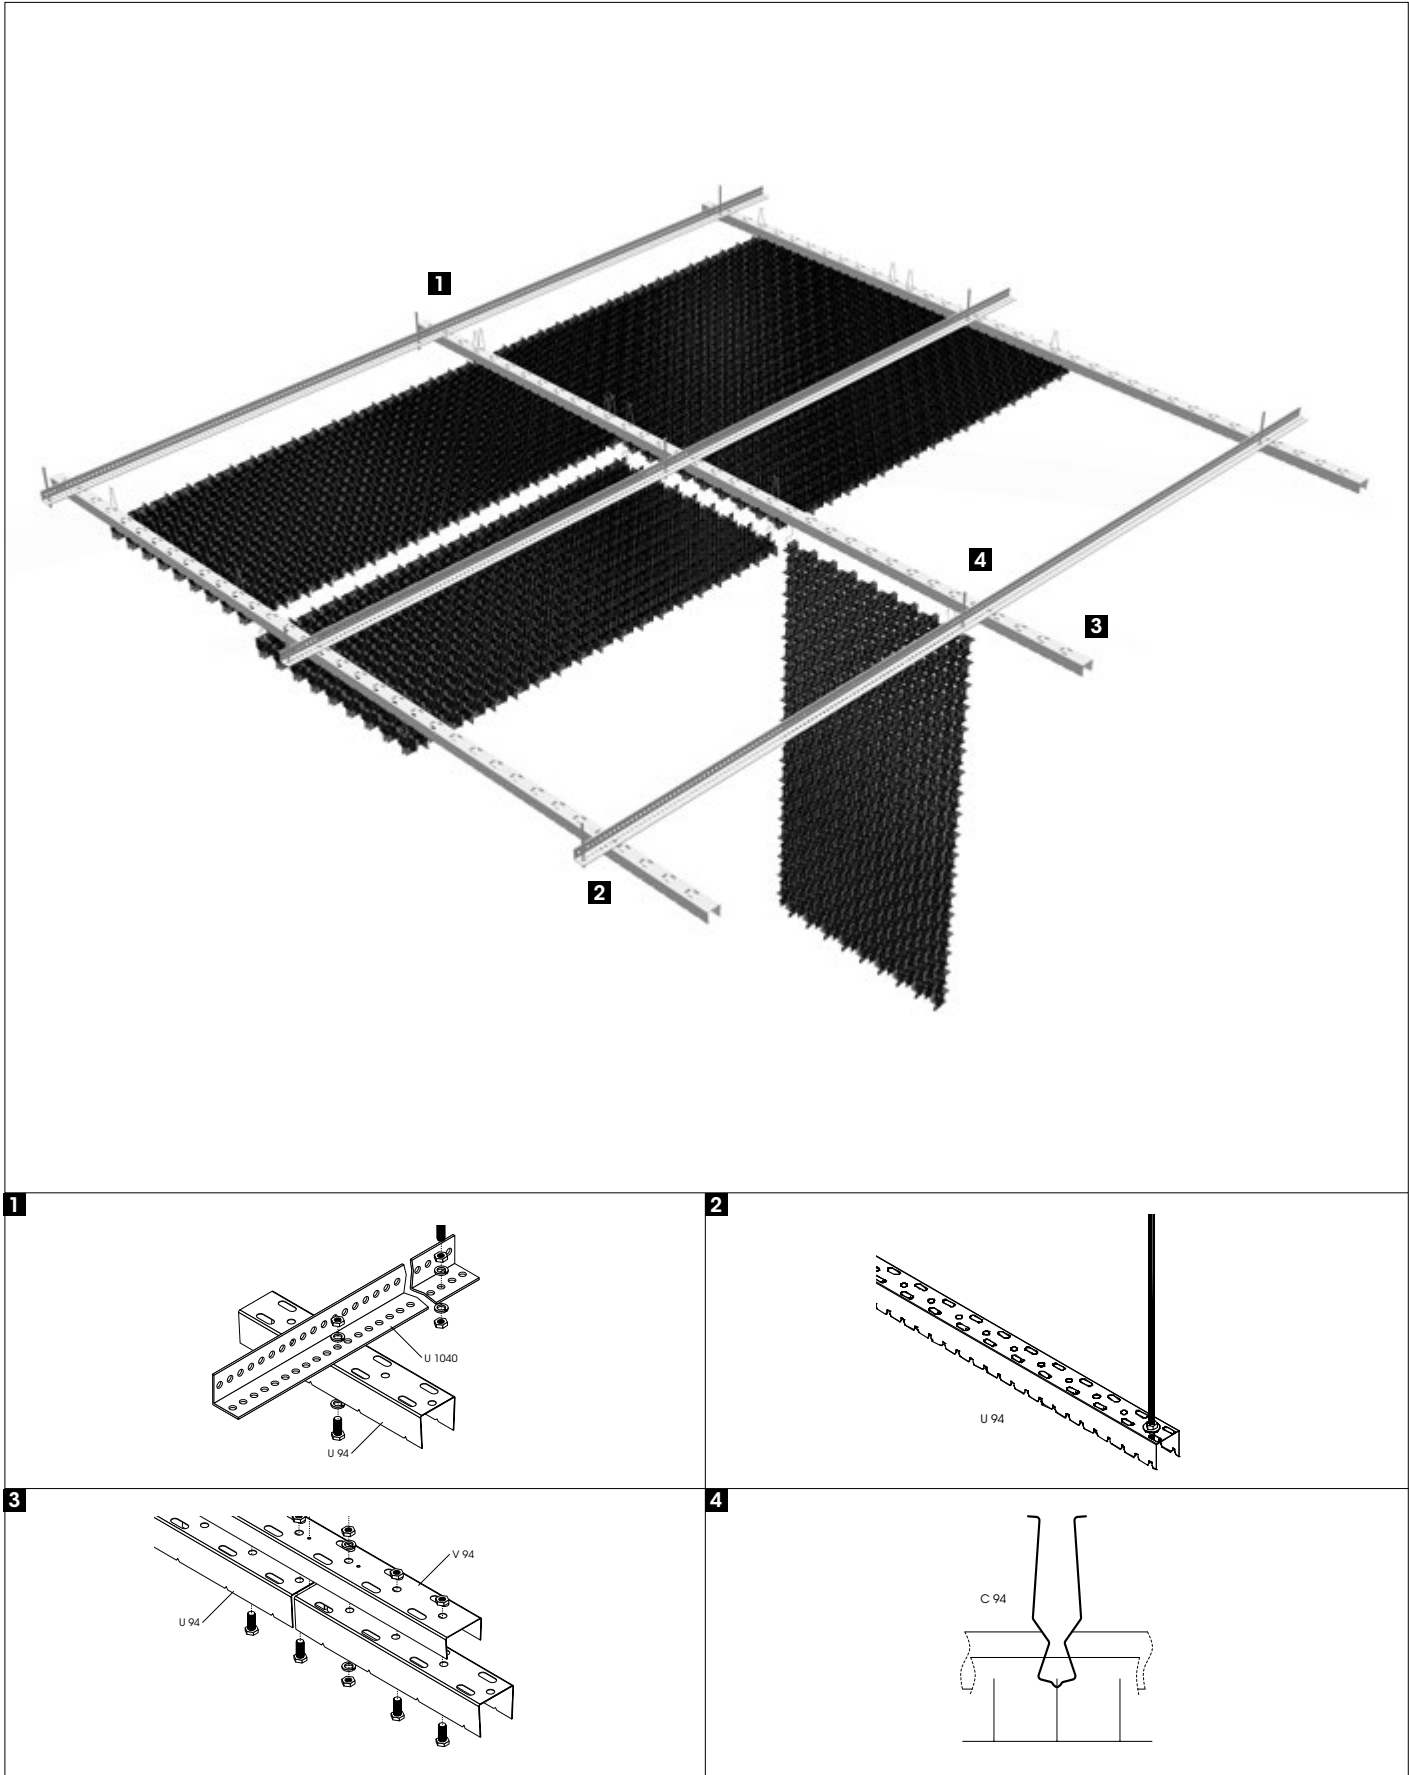

OPEN CELL CEILING

TICELL-N is a decorative single blade open cell ceiling system manufactured from perforated aluminium blades pressed together, available in white, black or natural anodized finish the panels are non combustible and light in weight. The unique process in the way the aluminium blades are punched creates a woven structure finish; this results in daylight reflecting off the exposed perforated edges producing a radiant effect. TICELL-N is available in two cell sizes to assist in obtaining the cut-off angle required to suit the individual requirement to hide any services within the ceiling void.

FIRE PERFORMANCE

In accordance with ASTM E84 Flame Spread Index for steel is 25 or less and Smoke Developed Index for steel is 50 or less.

GREEN BUILDING

durlum metal panels contribute directly to LEED and other GREEN BUILDING certifications. Typically applicable credits under LEED v4:

- Recycled Content – post- & pre-consumer info
- VOC Emissions – conformity with VOC requirements
- Acoustic Performance – sound absorption with acoustic fleece
- Environmental Product Declaration – available

SURFACE

Color: White, black and natural anodized aluminium
Other colors available on request

Material: Aluminium

DIMENSIONS

Panel size


1'-11 13/16" x 3'-11 11/16" [605 x 1211mm]

Main blades


Width: 1 5/16" [33mm]

Hight: 1 9/16" [40mm]

SYSTEM DETAILS

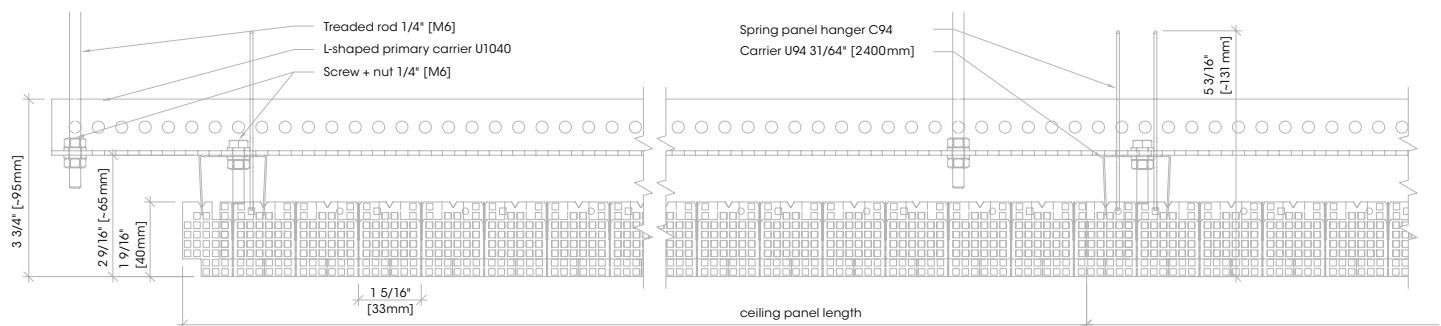

STANDARD PANEL

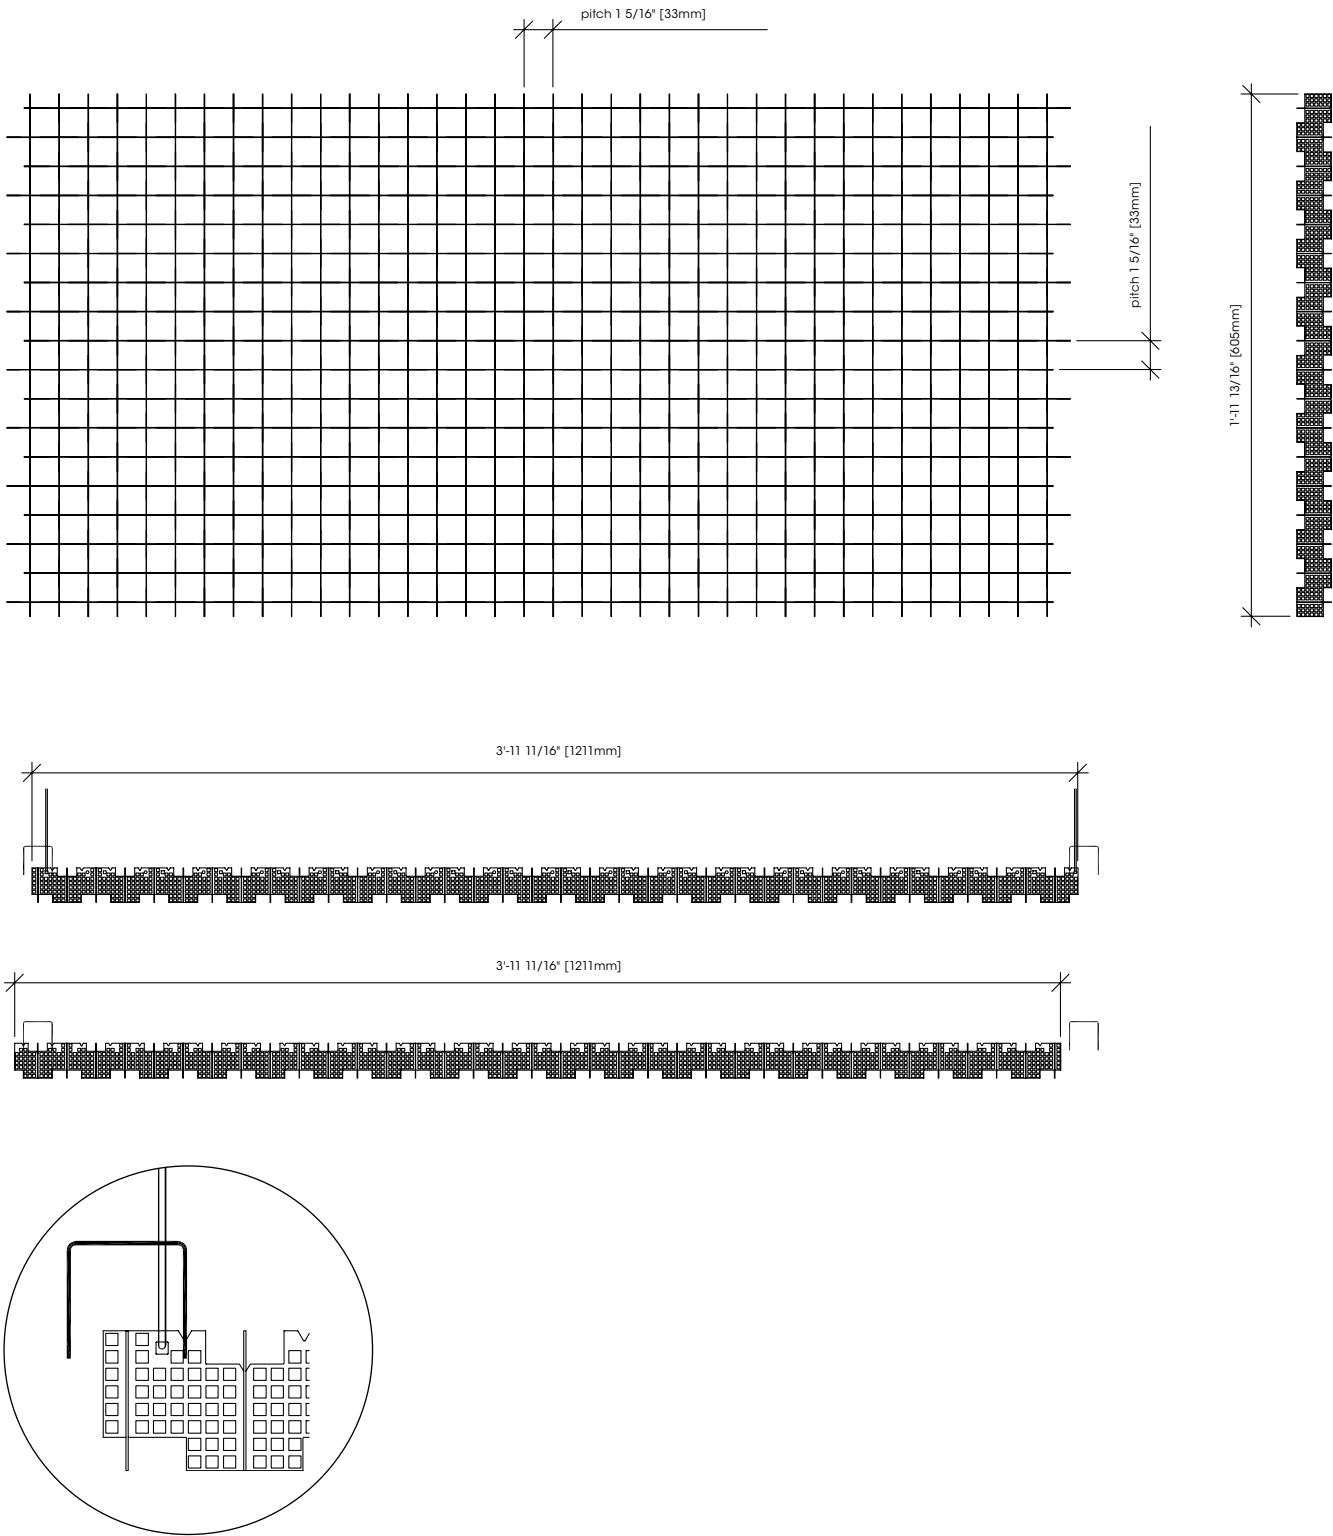

OPEN CELL CEILING

HORIZONTAL INSTALLATION

The carrier profiles U 94 are suspended at a distance of 3'-11 11/16" [1211 mm]. The distance of the threaded rods is approx. 3'-3 3/8" [1000 mm], the min. suspension height is 5 7/8" [150 mm]. The pre-assembled panel cells are snap-fitted into the carrier U 94 with the help of the spring panel hanger C 94. All panels can be hinged down.

The installation can be done by using the L-shaped primary carrier U 1040 for cross-bracing if the suspension height will allow it. We recommend this cross-bracing for every suspension height and for more than 1'-7 11/16" [500 mm], the use of the cross-bracing is necessary.

TECHNICAL STANDARDS

The parts comply with DIN EN 13964 as well as ASTM C635 and ASTM E1264. Production complies with the TAIM and CISCAs guidelines and the durlum works standards and is quality controlled by the TÜV according to ISO 9001:2008 and ISO 14001:2004.

PLEASE NOTE

Installation must be carried out by qualified and trained staff according to the instructions for installation. These are available as download at www.networkarchitectural.com.au.

CLEANING

As standard, durlum ceiling panels are made with an electrostatic polyester powder coating, thus providing them with a long-term finish. The powder-coated surface should always be cleaned wearing clean gloves. First clean it with a soft, dry cloth. If dirt cannot be removed by this procedure, the cloth can also be moistened, with the addition of a pH-neutral cleaner [household detergent], if necessary. Contact of the powder coating with both alkaline and acid substances must be avoided. Metallic powder coatings show a particularly sensitive reaction. Due to the risk of a change in hue or effect, for metallic coatings a suitability test must be performed.

MANUFACTURER

durlum Asia Ltd.
1709, 17F Two chinachem
Exchange Square
338 King's Road, North Point
Hong Kong SAR
China

CONTACT

NETWORK ARCHITECTURAL
71 Marigold Street
Revesby NSW 2212

Phone: +61 2 8316 5000
info@networkarchitectural.com.au
networkarchitectural.com.au